

Triton Baffle Beam™ NRC 0.75

FEATURES AND BENEFITS

- Long beam design provides a clean linear look
- High sound absorption rating for control of reverberation
- 40, 50 or 75mm thick in a range of standard or custom depths up to 580mm
- Group 1S fire rating
- Light weight and dimensionally stable
- Available white, black, grey, wood-grain prints and RAL colours to order.
- GreenTag Certified / Level A

APPLICATIONS


Baffle Beams™ are ideal for reception areas, corridors, open plan offices, showrooms, galleries, hospitality and large public spaces.

COMPOSITION

Made in NZ from proprietary Sonatex™ die cut and folded over 80kg/m³ bio-soluble glass fibre core.

DESCRIPTION

Triton Baffle Beam™ is a linear high sound absorbing non combustible glass fibre ceiling designed to control unwanted noise reverberation and to provide an attractive linear aesthetic. They can be direct fixed to lining or suspended and are available in range of widths, depths and lengths. For long runs they are joined end on end on site. The glass fibre core is wrapped with a proprietary Sonatex™ 2 ply glass mat acoustic laminate that is available in white, black, wood look print and a range of colours.

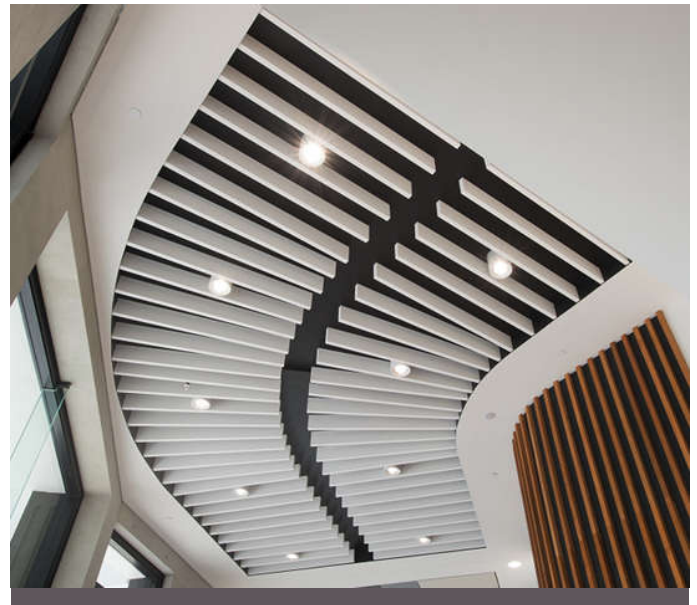

Item #	Size (nominal)*	Edge
BB40.01.24	40 x 100 x 2400	Square
BB40.015.24	40 x 150 x 2400	Square
BB40.02.24	40 x 200 x 2400	Square
BB40.03.24	40 x 300 x 2400	Square
BB40.04.24	40 x 400 x 2400	Square
BB40.05.24	40 x 500 x 2400	Square
BB40.06.24	40 x 600 x 2400	Square
BB50.01.24	50 x 100 x 2400	Square
BB50.015.24	50 x 150 x 2400	Square
BB50.02.24	50 x 200 x 2400	Square
BB50.03.24	50 x 300 x 2400	Square
BB50.04.24	50 x 400 x 2400	Square
BB50.05.24	50 x 500 x 2400	Square
BB50.06.24	50 x 600 x 2400	Square
BB75.01.24	75 x 100 x 2400	Square
BB75.02.24	75 x 200 x 2400	Square
BB75.03.24	75 x 300 x 2400	Square
BB75.04.24	75 x 400 x 2400	Square
BB75.05.24	75 x 500 x 2400	Square
BB75.06.24	75 x 600 x 2400	Square

TRITON BAFFLE BEAM™ NRC 0.75

HIGH SOUND ABSORBING CEILING BEAM



SOUND ABSORPTION

40 x 280 Beam @ 300mm centres, NRC 0.75, Test result: T1324-8. 40 x 280 Beam @ 600mm centres, NRC 0.55, Test result: T1324-9. PU coated decorative foil finish: 40 x 280 @ 300 mm centres, NRC 0.45, Text results: T1324-10

COLOUR

Sonatex:(White AS180) (Mid Grey RAL7040) (Light Grey RAL7030) (Grey White RAL9002) (Wood Wool Print) (Plaster Print) (Wood Print over RAL1014 Oak) (Wood Print over RAL1013 Blond) (Wood Print over RAL8019 Walnut) (Zinc Yellow RAL1018) (Ivory RAL1014) (Graphite Black RAL9011) (Traffic Red RAL3020) (Orient Red RAL3031) (Traffic Orange RAL2009) (Traffic Green RAL6032) (Aqua RAL6027) or (1963 White Glass Woven Fibre Fabric), other finishes to order.

ENVIRONMENTAL IMPACT

Core from 80% recycled local waste glass, product and packaging can be reused/recycled in NZ. Low VOC <0.002 Mg/M²/hr per ASTM D5116

FIRE REACTION

Standard	Flame Spread	Smoke Developed
ASTM E84	<25	<50
AS/NZS 3837	Group Number Classification: 1 unsprinklered	
ISO 5660 Parts 1 & 2	Group Number Classification: 1 - S	

HUMIDITY

Max 99% R/H at 45°C

LIGHT REFLECTANCE

ASTM C1477 LR-1, >75% White

MAINTENANCE

Clean with vacuum, soft brush or damp cloth. Re-surfacing of panels available, consult USG Boral

WARRANTY PERIOD

5 years

WEIGHT

40 mm x 280mm @ 1.2 kg /lm

50 mm x 280mm @ 1.4 kg /lm

75 mm x 280mm @ 1.6 kg /lm

INSTALLATION

Triton Baffle Beams™ are a finishing trade, installation shall not commence until the building is water tight, dry and free of dust and debris. Screw fix or suspend APC-3000 top channel. Then friction fix baffle beam to top channel with MS Polymer adhesive. Space baffles evenly or as required by acoustical consultant. To join panels saw cut ends and use contact adhesive to butt join. Cap open ends with Sonatex™

Acoustic panels shall be Triton Baffle Beam™ as manufactured and supplied by Asona Ltd Tel: 09 525 6575 Fax: 09 525 6579, item # (), size shall be () x ()mm, thickness shall be (25) (40) (50)(75)mm, finish shall be Sonatex 2 ply acoustic laminate in Sonatex: (White AS180), (White AS600), (White AS700) (Mid Grey RAL7040) (Light Grey RAL7030) (Grey White RAL9002) (Wood Wool Print) (Plaster Print) (Wood Print over RAL1014 Oak) (Wood Print over RAL1013 Blond) (Wood Print over RAL8019 Walnut) (Zinc Yellow RAL1018) (Ivory RAL1014) (Graphite Black RAL9011)(Traffic Red RAL3020) (Orient Red RAL3031) (Traffic Orange RAL2009) (Traffic Green RAL6032) (Aqua RAL6027) or (1963 White Glass Woven Fibre Fabric). Panels shall be delivered to site with protective plastic film coating that is to be removed on installation. Suspend or direct fix panels to the structure using manufacturers approved fixings.

SALES ENQUIRIES **1800 003 377 (AU)**

TecASSIST® **1800 811 222 (AU)**



© 2017 USG BORAL. All rights reserved.

Sold or distributed by USG Boral Building Products or one or more of its affiliates. INNOVATION INSPIRED BY YOU is a trademark of USG Boral Building Products or one or more of its affiliates.

Manufactured by Asona, Asona, Triton and Fabwall are trade marks of Asona Limited, NZ. 2016

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation

UB1162-CEI-4 10/17